


**规格SPECIFICATIONS**

间距(PITCH): 2.5mm  
 极数(Poles): 2~20  
 适用电线范围(Useable wire range): AWG30#~22#  
 适用印制板厚度(Applicable PC board thickness): 1.6mm  
 额定电流(Current rating): 3A, AC, DC  
 额定电压(Voltage rating): 250V, AC, DC  
 工作温度(Working Temperature): -25℃ ~ +85℃  
 耐压值(Withstand voltage): 1000V, AC /min  
 接触电阻(Contact resistance): ≤ 0.01Ω  
 绝缘电阻(Insulation resistance): ≥ 1000mΩ


**材料MATERIAL**

孔座(HOUSING): 尼龙66 UL94V-0 (NYlon66 UL94V-0)  
 针座(PIN HEADER):  
 1、基座(WATER): 尼龙66 UL94V-0 (NYlon66 UL94V-0)  
 2、插针(PIN): 黄铜(BRASS)  
 端子(TERMINAL): 磷青铜(PHOSPHOR BRONZE)


**XH-T**

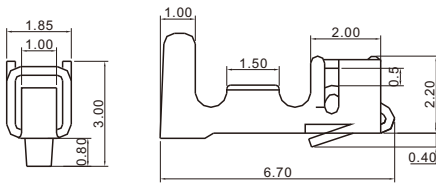


**XH-AWD**

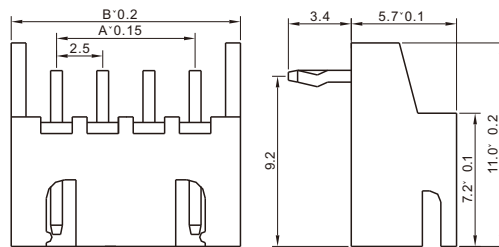


**XH-Y**

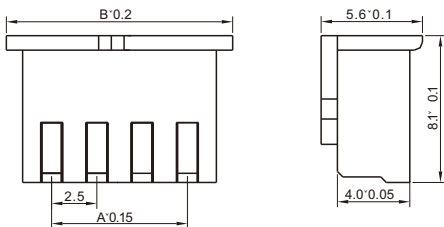

**XH-A**

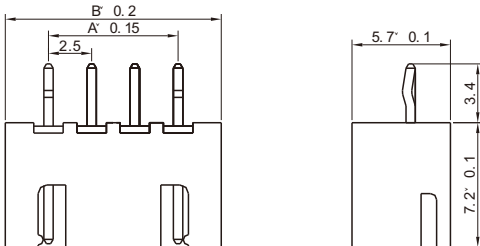

**XH-AW**

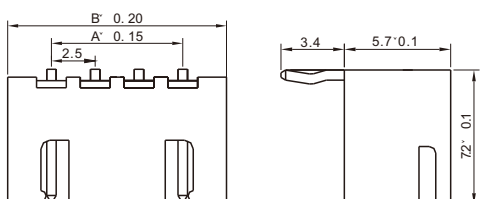

线数 poles	型号(Type)				A	B
2	XH-2Y	XH-2A	XH-2AW	XH-2AWD	2.50	7.50
3	XH-3Y	XH-3A	XH-3AW	XH-3AWD	5.00	10.00
4	XH-4Y	XH-4A	XH-4AW	XH-4AWD	7.50	12.50
5	XH-5Y	XH-5A	XH-5AW	XH-5AWD	10.00	15.00
6	XH-6Y	XH-6A	XH-6AW	XH-6AWD	12.50	17.50
7	XH-7Y	XH-7A	XH-7AW	XH-7AWD	15.00	20.00
8	XH-8Y	XH-8A	XH-8AW	XH-8AWD	17.50	22.50
9	XH-9Y	XH-9A	XH-9AW	XH-9AWD	20.00	25.00
10	XH-10Y	XH-10A	XH-10AW	XH-10AWD	22.50	27.50
11	XH-11Y	XH-11A	XH-11AW	XH-11AWD	25.00	30.00
12	XH-12Y	PH-12A	XH-12AW	XH-12AWD	27.50	32.50
13	XH-13Y	XH-13A	XH-13AW	XH-13AWD	30.00	35.00
14	XH-14Y	XH-14A	XH-14AW	XH-14AWD	32.50	37.50
15	XH-15Y	XH-15A	XH-15AW	XH-15AWD	35.00	40.00
16	XH-16Y	XH-16A	XH-16AW	XH-16AWD	37.50	42.50
17	XH-13Y	XH-17A	XH-17AW	XH-17AWD	40.00	45.00
18	XH-14Y	XH-18A	XH-18AW	XH-18AWD	42.50	47.50
19	XH-15Y	XH-19A	XH-19AW	XH-19AWD	45.00	50.00
20	XH-16Y	XH-20A	XH-20AW	XH-20AWD	47.50	52.50