


间距Pitch: 2.50mm  
(5264)CONNECTOR

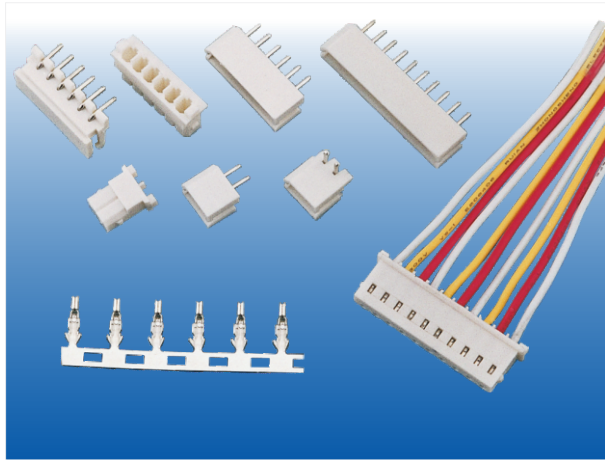


规格SPECIFICATIONS

间距(PITCH): 2.5mm  
极数(Poles): 2~15  
适用电线范围(Useable wire range): AWG30#~22#  
适用印制板厚度(Applicable PC board thickness): 1.6mm  
额定电流(Current rating): 3A, AC, DC  
额定电压(Voltage rating): 250V, AC, DC  
工作温度(Working Temperature): -25℃ ~ +85℃  
耐压值(Withstand voltage): 1000V, AC /min  
接触电阻(Contact resistance):  $\leq 0.01\Omega$   
绝缘电阻(Insulation resistance):  $\geq 1000m\Omega$


材料MATERIAL

孔座(HOUSING): 尼龙66 UL94V-0 (NYlon66 UL94V-0)  
针座(PIN HEADER):  
1、基座(WATER): 尼龙66 UL94V-0 (NYlon66 UL94V-0)  
2、插针(PIN): 黄铜(BRASS)  
端子(TERMINAL): 磷青铜(PHOSPHOR BRONZE)


5264-T

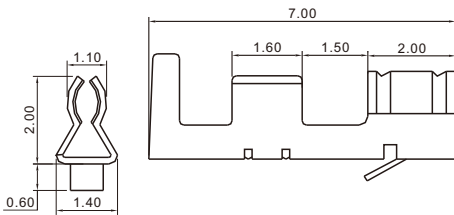


5264-Y

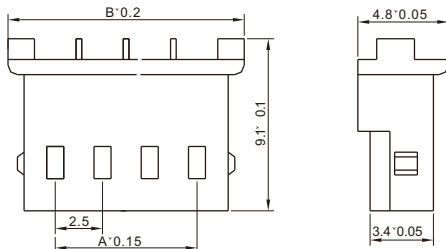


5264-A

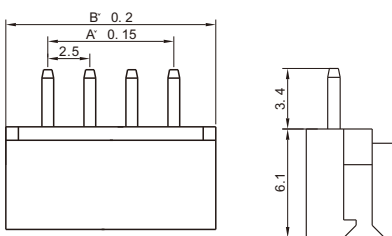

5264-AW

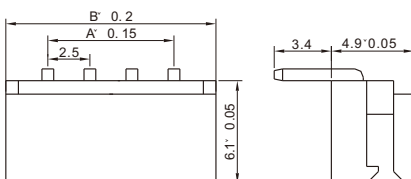

5264-AWD

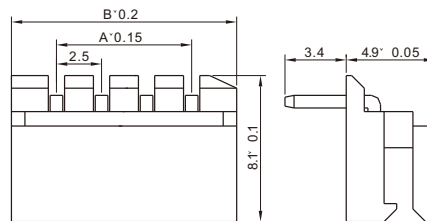

线数 poles	型号(Type)				A	B
2	5264-2Y	5264-2A	5264-2AW	5264-2AWD	2.50	7.50
3	5264-3Y	5264-3A	5264-3AW	5264-3AWD	5.00	10.00
4	5264-4Y	5264-4A	5264-4AW	5264-4AWD	7.50	12.50
5	5264-5Y	5264-5A	5264-5AW	5264-5AWD	10.00	15.00
6	5264-6Y	5264-6A	5264-6AW	5264-6AWD	12.50	17.50
7	5264-7Y	5264-7A	5264-7AW	5264-7AWD	15.00	20.00
8	5264-8Y	5264-8A	5264-8AW	5264-8AWD	17.50	22.50
9	5264-9Y	5264-9A	5264-9AW	5264-9AWD	20.00	25.00
10	5264-10Y	5264-10A	5264-10AW	5264-10AWD	22.50	27.50
11	5264-11Y	5264-11A	5264-11AW	5264-11AWD	25.00	30.00
12	5264-12Y	5264-12A	5264-12AW	5264-12AWD	27.50	32.50
13	5264-13Y	5264-13A	5264-13AW	5264-13AWD	30.00	35.00
14	5264-14Y	5264-14A	5264-14AW	5264-14AWD	32.50	37.50
15	5264-15Y	5264-15A	5264-15AW	5264-15AWD	35.00	40.00